



# Single-Color LED Downlight

Mã sản phẩm DLD90DS5W01, DLD90DS7W02, DLD90DS5W03, DLD90DS7W04, DLD110DS7W05  
DLD110DS9W06, DLD110DS7W07, DLD110DS9W08, DLD140DS12W09, DLD140DS16W10

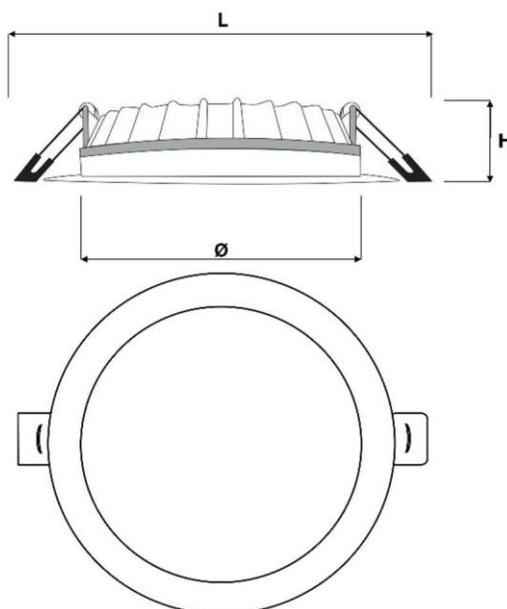
## User Manual

### Specifications


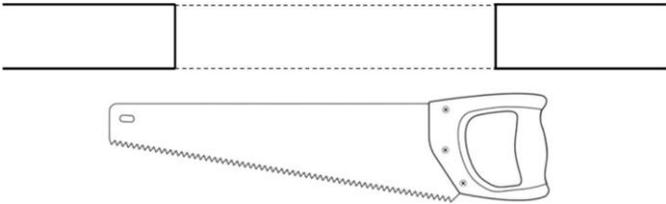
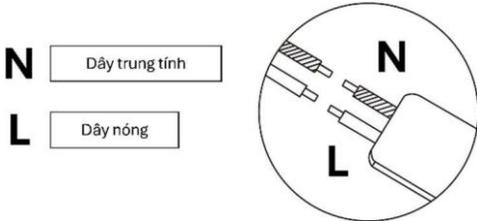
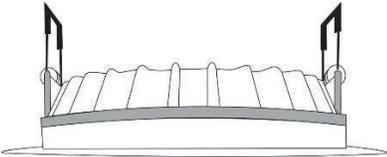


SKU	Mains Input	Power (W)	Luminous Flux (lm)	Luminous Efficacy (lm/W)	ColorTemperature	Housing
DLD90DS5W01	100-265V AC 50-60HZ	5	700	140	6000K	Plastic
DLD90DS7W02	100-265V AC 50-60HZ	7	980	140	6000K	Plastic
DLD90DS5W03	100-265V AC 50-60HZ	5	700	140	6000K	Ribbed Plastic
DLD90DS7W04	100-265V AC 50-60HZ	7	980	140	6000K	Ribbed Plastic
DLD110DS7W05	100-265V AC 50-60HZ	7	980	140	6000K	Plastic
DLD110DS9W06	100-265V AC 50-60HZ	9	1260	140	6000K	Plastic
DLD110DS7W07	100-265V AC 50-60HZ	7	980	140	6000K	Ribbed Plastic
DLD110DS9W08	100-265V AC 50-60HZ	9	1260	140	6000K	Ribbed Plastic
DLD140DS12W09	100-265V AC 50-60HZ	12	1680	140	6000K	Plastic
DLD140DS16W10	100-265V AC 50-60HZ	16	2240	140	6000K	Plastic

### Dimensions

SKU	Diameter (Ø)	Length (L)	Height (H)
DLD90DS5W01	90	120	40
DLD90DS7W02	90	120	40
DLD90DS5W03	90	120	40
DLD90DS7W04	90	120	40
DLD110DS7W05	110	140	40
DLD110DS9W06	110	140	40
DLD110DS7W07	110	140	40
DLD110DS9W08	110	140	40
DLD140DS12W09	140	182	40
DLD140DS16W10	140	182	40



## Installation

	
<p><b>Step 1:</b> Turn off the power</p>	<p><b>Step 2:</b> Determine the installation position of the luminaire and cut the mounting hole</p>
	
<p><b>Step 3:</b> Connect the prepared wires to the driver of the lamp</p>	<p><b>Step 4:</b> Push the spring clips upward to a 90-degree angle</p>
	
<p><b>Step 5:</b> Insert the lamp into the mounting hole and release the clips</p>	<p><b>Step 6:</b> Turn on the power</p>

## Warning

When installing lighting fixtures, installation should be carried out by qualified professionals. If self-installation is performed, please follow the instructions below:

- a. Turn off the power supply of the electrical system before installation or maintenance
- b. Prepare necessary tools such as cutters, screwdrivers, electrical tape, or quick connectors
- c. Use a voltage tester to check the electrical system before installation
- d. Use a ladder to access the installation position, ensuring stability when working at height
- e. For warranty details, please visit: <https://ecolighting.com.vn/bao-hanh/>

PFC Trading & Investment Co., Ltd.

Address: 8th Floor, Viwaseen Tower, 48 To Huu Street, Trung Van Ward, Nam Tu Liem District, Hanoi, Vietnam

Phone: 0922 79 3636

Email: [cskh@ecolighting.com.vn](mailto:cskh@ecolighting.com.vn)

Website: [ecolighting.com.vn](http://ecolighting.com.vn)