



Multi-Color LED Spotlight

SKU RSS4KD90V5W, RSS6KD90V7W, RSS4KD90T5W,
RSS6KD90T7W, RSS4KD110V9W, RSS6KD110V9W,
RSS4KD110T9W, RSS6KD110T9W

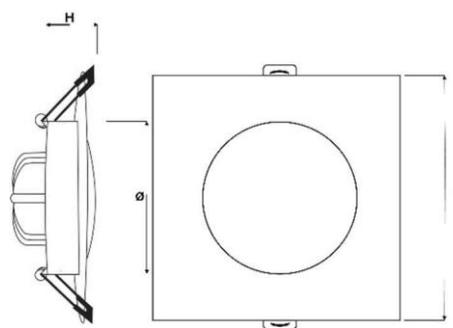
User Manual

Specifications


SKU	Mains Input	Power (W)	Luminous Flux (lm)	Luminous Efficacy (lm/W)	ColorTemperature	Fixture Shape
RSS4KD90V5W	100-265V AC 50-60HZ	5	800	160	4000K/6000K	Square
RSS6KD90V7W	100-265V AC 50-60HZ	7	1120	160	4000K/6000K	Square
RSS4KD90T5W	100-265V AC 50-60HZ	5	800	160	4000K/6000K	Round
RSS6KD90T7W	100-265V AC 50-60HZ	7	1120	160	4000K/6000K	Round
RSS4KD110V9W	100-265V AC 50-60HZ	9	1440	160	4000K/6000K	Square
RSS6KD110V9W	100-265V AC 50-60HZ	9	1440	160	4000K/6000K	Square
RSS4KD110T9W	100-265V AC 50-60HZ	9	1440	160	4000K/6000K	Round
RSS6KD110T9W	100-265V AC 50-60HZ	9	1440	160	4000K/6000K	Round

Dimensions






SKU	Diameter (Ø)	Surface Area (LxL)	Height (H)
RSS4KD90V5W	90	112x112	45
RSS6KD90V7W	90	112x112	45
RSS4KD110V9W	110	132x132	40
RSS6KD110V9W	110	132x132	40



SKU	Diameter (Ø)	Length (L)	Height (H)
RSS4KD90T5W	90	110	45
RSS6KD90T7W	90	110	45
RSS4KD110T9W	110	130	45
RSS6KD110T9W	110	130	45

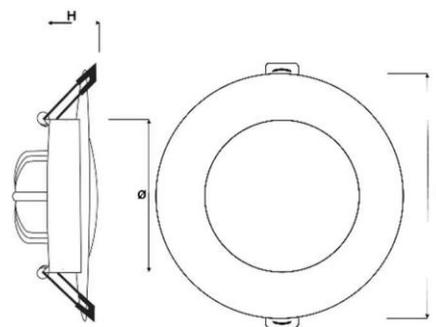

Installation

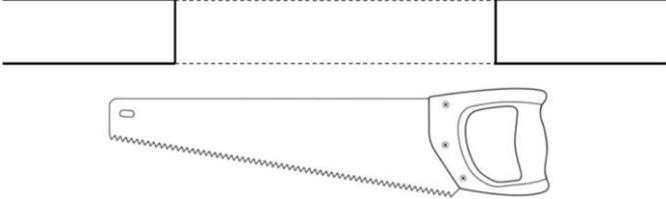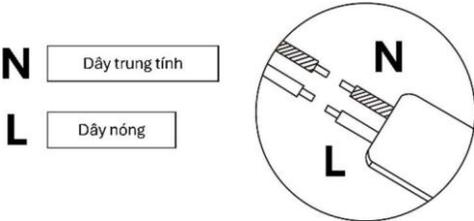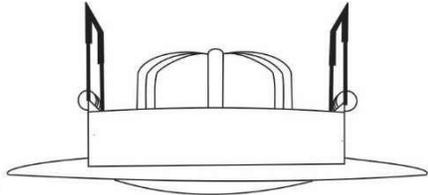	
<p>Step 1: Turn off the power</p>	<p>Step 2: Determine the installation position of the luminaire and cut the mounting hole</p>
	
<p>Step 3: Connect the prepared wires to the driver of the lamp</p>	<p>Step 4: Push the spring clips upward to a 90-degree angle</p>
	
<p>Step 5: Insert the lamp into the mounting hole and release the clips</p>	<p>Step 6: Turn on the power</p>

Cảnh báo

Installation should be carried out by qualified professionals. In case installation must be performed without a professional technician, please follow the instructions below:

- Turn off the power supply to the system before replacement or installation
- Prepare necessary tools such as wire cutters/strippers, electrical tape, or quick wire connectors
- Use a voltage tester to check before installation
- Use a proper ladder to access the installation position, ensuring stability when working at height
- Turn the light on/off to adjust the color temperature
- For detailed warranty policy, please visit: <https://ecolighting.com.vn/bao-hanh/>

PFC Trading & Investment Co., Ltd.

Address: 8th Floor, Viwaseen Tower, 48 To Huu Street, Trung Van Ward, Nam Tu Liem District, Hanoi, Vietnam

Phone: 0922 79 3636

Email: cskh@ecolighting.com.vn

Website: ecolighting.com.vn